

HYDE WALL MOUNT FIXTURES ASSEMBLY/INSTALLATION INSTRUCTIONS

NOTE: This fixture is suitable for up or down mounting.

1. Before beginning installation, carefully unpack and identify all parts referring to Figure 1. Be sure the power to the installation point is OFF.
2. Using (2) JUNCTION BOX SCREWS, securely fasten the CROSSBAR to the JUNCTION BOX.
3. **MAKE CONNECTIONS:** (We recommend 2 people for the remainder of installation) Position the FIXTURE in front of the JUNCTION BOX, Connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE. Secure both to the CROSSBAR with GREEN GROUND SCREW. Using wire Connectors, connect the SUPPLY WHITE WIRE(S) to the FIXTURE WHITE (or RIBBED) LEAD(S); Connect the SUPPLY BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD(S). Wrap all connections with approved electrical tape.
4. Place the BACK PLATE over the CROSSBAR and secure it with (2) LOCK NUTS.
5. Locate the GLASS SHADE(S) and pass over the SOCKET(S), Use SOCKET RING WRENCH to thread SOCKET RING(S) onto end of the SOCKET(S) and tighten.
6. Install the BULB(s) (sold separately) referring to fixture labels for maximum wattage. The bulb quantities depend on the style (Refer to Figure 2)

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

7. Restore electrical power to installation point. Retain this sheet for future reference.

Customer Service: 1-800-558-8700

FIGURE 1

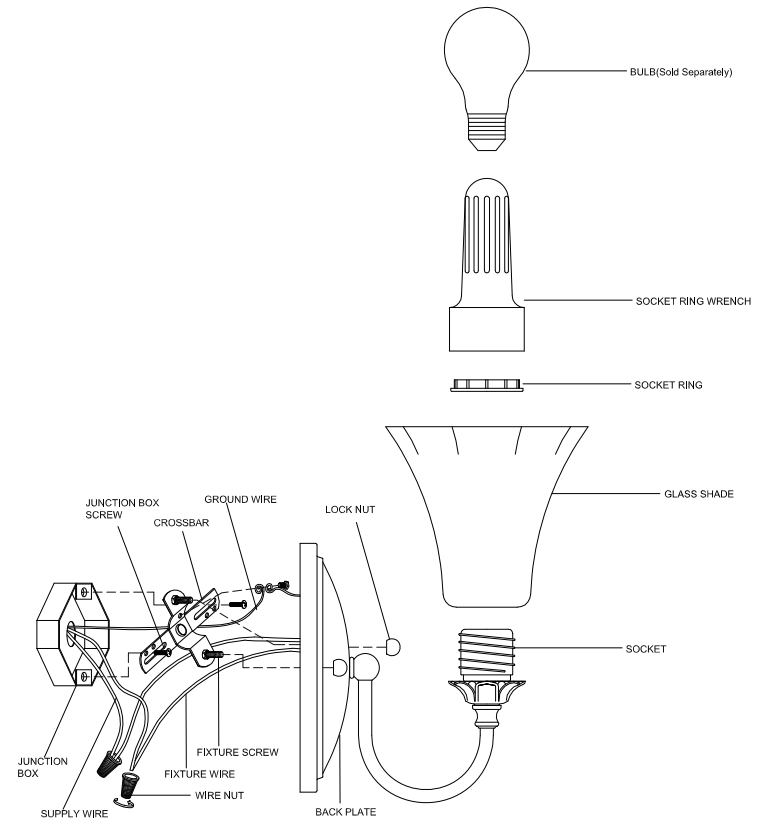


FIGURE 2

