



AVON 9.25 DIA 2LT OPAL GLS PB SKU#521054

ASSEMBLY / INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards.

If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions. Tools are required when install this fixture.

REQUIRED TOOLS


Philips screwdriver

ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker

1. Fasten the provided 2 MOUNTING SCREWS to the MOUNTING BAR. Make sure the thread of the screw is facing downward when the MOUNTING BAR is attached to the OUTLET BOX. Fasten the MOUNTING BAR using 2 OUTLET BOX SCREWS provided.
2. Tie the ground wire from the OUTLET BOX to the GROUND SCREW on the MOUNTING BAR. Connect the white wire to white and black to black, cover the connections using WIRE NUT provided.
3. Carefully tuck all wiring back into the OUTLET BOX. Locate the CANOPY over the OUTLET BOX, positioning the MOUNTING SCREWS heads through the large openings of the keyhole slots. Rotate the CANOPY to line up the screws, and tighten securely.
4. Install the BULB (Not included).
5. Carefully take the GLASS SHADE out of the box. Place GLASS SHADE over the CANOPY & secure it by tightening the THUMB SCREWS.

Turn on the power at fuse or circuit breaker.

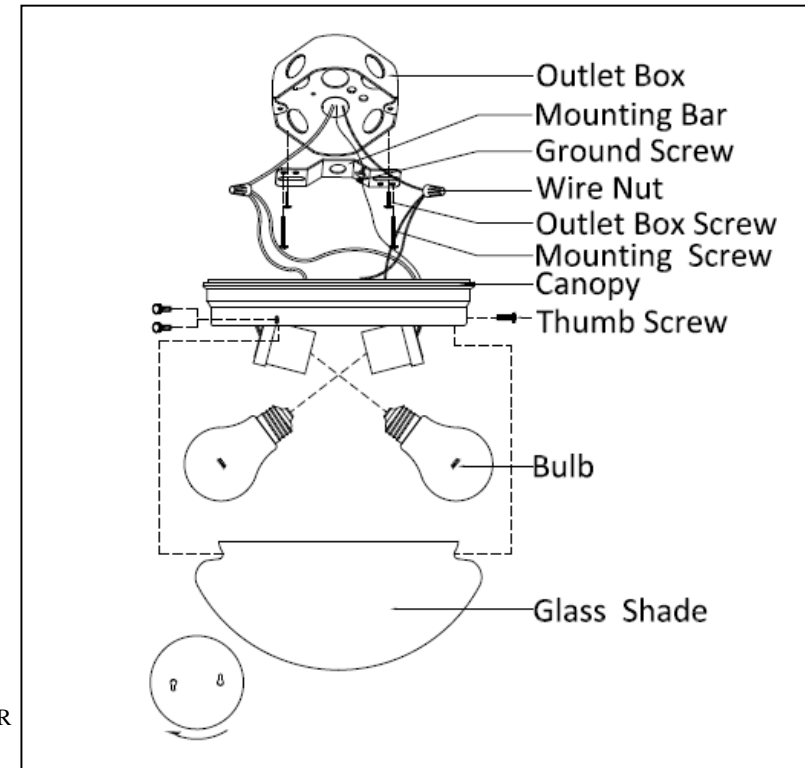

ITEM#521054

*IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.*

Customer Service: 1-800-558-8700