



EASTPORT 2LT BAR LIGHT

(Item #570929)

ASSEMBLY AND INSTALLATION

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Min 90°C supply conductors. Consult a qualified electrician to ensure correct installation. Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker

1. Attach the MOUNTING RING to the OUTLET BOX with OUTLET BOX SCREW.
2. Pull out the SUPPLY WIRES and the SUPPLY GROUND WIRE from the OUTLET BOX. Make wire connections using the WIRE NUTS:
 - The BLACK FIXTURE WIRE to the BLACK SUPPLY WIRE.
 - The WHITE FIXTURE WIRE to the WHITE SUPPLY WIRE.
 - Wrap the FIXTURE GROUND WIRE around the GREEN GROUND SCREW on the MOUNTING RING. Then connect it to the SUPPLY GROUND WIRE with a WIRE NUT. Carefully tuck wires back into the OUTLET BOX.
3. Attach BLACK PLATE onto wall using BALL NUTS.
4. Install BULBS (Type T10, A15 medium base, screw in bulb, incandescent bulb or equivalent CFL or LED replacement; not included)
5. Insert (2) GLASS SHADE(s) into the metal tube(s) and finger tighten with SCREW(s)
6. Turn on the power at the main fuse or circuit breaker box and keep this sheet for future reference.

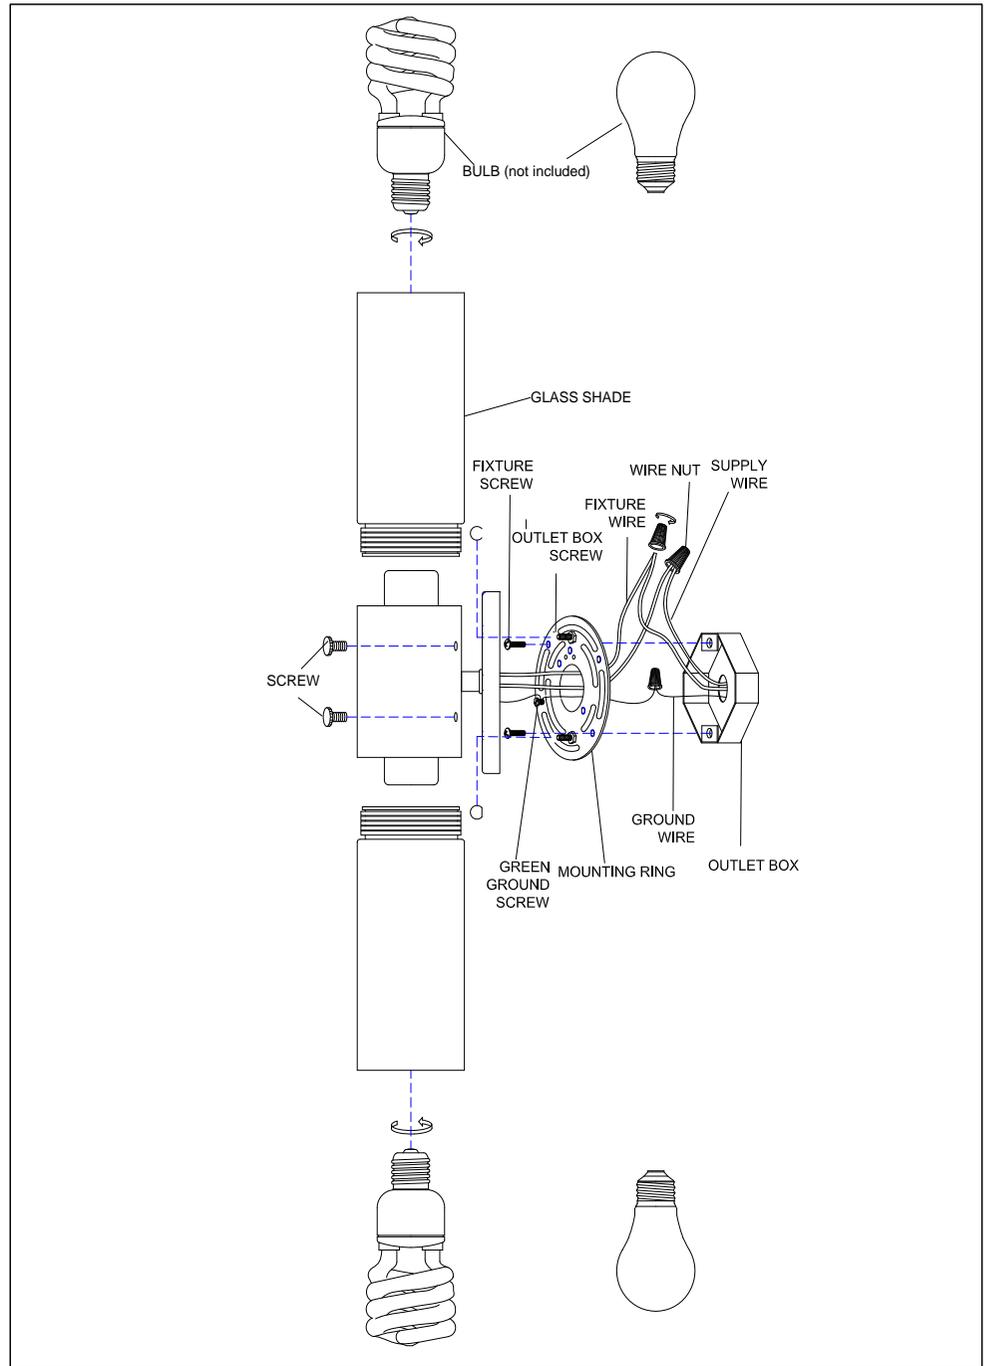

Item#570929

Customer Service: 1-800-558-8700

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**