



PERTH 4LT PENDANT SN SKU#578344

ASSEMBLY / INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards.

If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions. Tools are required when install this fixture.

REQUIRED TOOLS


Philips screwdriver, Spanner Wrench,

ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Unscrew the FINIAL, DECORATIVE CAP, HEX NUT A and STEEL WASHER from the NIPPLE A.
3. Place the SHADE over NIPPLE A, tightly secure with STEEL WASHER, HEX NUT A.
4. Attach the DECORATIVE CAP and two SQUARE ARMS over the NIPPLE A, and make sure the two SQUARE ARMS are in an "X" position. Then tightly secure with FINIAL.
5. Unscrew the HEX NUT B from the NIPPLE B. Attach the four top ends of the SQUARE ARMS onto the CROSS PLATE by aligning the holes of the top ends of the SQUARE ARMS. Then tightly secure the four edges of the SQUARE ARMS with HEX NUT B **by using Spanner Wrench**.
6. Screw the TUBE D into the NIPPLE B, screw the TUBE C into the TUBE D, screw the TUBE B into the TUBE C, screw the TUBE A into the TUBE B. Screw the TUBE A into the NIPPLE C from CANOPY.
7. Fasten the CROSS BAR onto the OUTLET BOX by using 2 OUTLET BOX SCREWS provided. Make sure the threads of the screws are facing downward when the CROSS BAR is attached to the OUTLET BOX.
8. Tie ground wire from OUTLET BOX and from fixture to the GROUND SCREW on the CROSS BAR. Connect white wire from fixture to white wire (neutral wire) from supply circuit. Connect black wire from fixture to black wire (live wire) from supply circuit. Cover connections using provided WIRE CONNECTORS.
9. Rotate the CANOPY to line up the screws, and securely tighten with LOCK NUTS.
10. Install the BULBS (not included).

Turn on the power at fuse or circuit breaker.

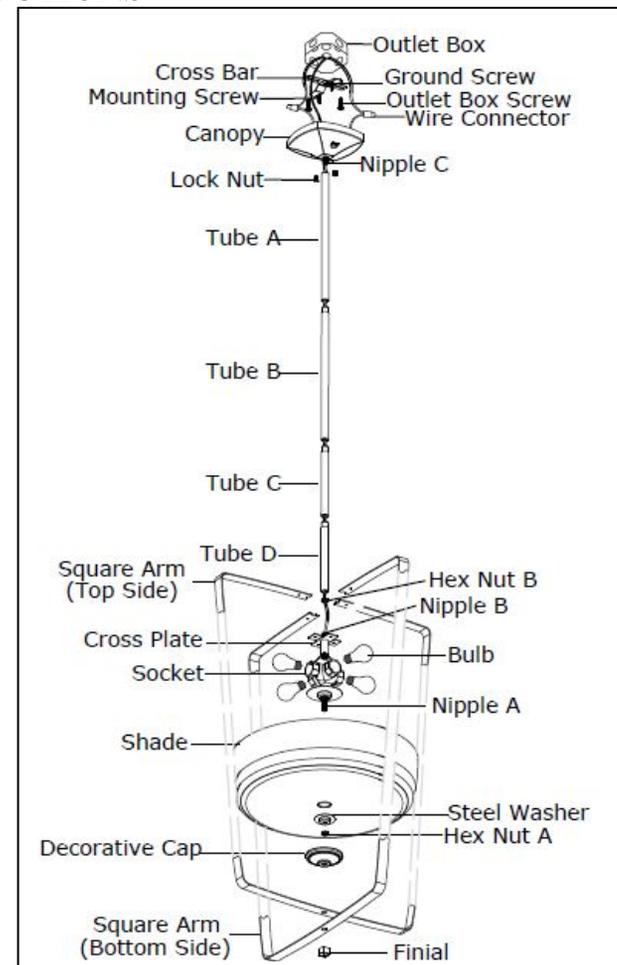

ITEM#578344

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service: 1-800-558-8700