




## SYRAH 3 LT VANITY LIGHT ASSEMBLY/INSTALLATION INSTRUCTIONS

1. Before beginning the installation, carefully unpack and identify all parts. Be sure the power to the installation point is OFF.
2. Using (2) JUNCTION BOX SCREWS, securely fasten the MOUNTING STRAP to the JUNCTION BOX.

**NOTE:** This fixture also provided with 2 wood screws for optional channel shape MOUNTING BRACKET installation. It will be necessary to mark the location of the keyhole slots on the mounting surface and drill holes for fasteners. Use fasteners suitable for the mounting surface. The narrow end of the KEYHOLE SLOTS should face up. Fit the heads of the WOOD SCREWS through the KEYHOLE SLOTS in the MOUNTING STRAP, pull down the MOUNTING STRAP until the WOOD SCREW heads are seated at the small ends of the KEYHOLE SLOTS, and secure both WOOD SCREWS.

3. **MAKE THE CONNECTIONS:** (We recommend (2) people for the remainder of installation) Position the FIXTURE in front of the OUTLET BOX and pass the FIXTURE SUPPLY and GROUND WIRES through the center of the NIPPLE. Connect the HOUSE GROUND WIRE to the FIXTURE GROUND WIRE. Secure both to the MOUNTING STRAP with GREEN GROUND SCREW. Using wire Connectors, connect the HOUSE WHITE WIRE(S) to the FIXTURE WHITE(or RIBBED) LEAD(S); Connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD(S). Wrap all connections with approved electrical tape.
4. Place the BACK PLATE over the MOUNTING STRAP and secure it with (4) LOCK SCREWS..
5. Locate the GLASS SHADES and pass over the SOCKETS, then thread SOCKET RINGS onto end of the SOCKETS. Hand tighten until snug.
6. Install LIGHT BULB(s) (Sold separately) referring to fixture markings or labels for maximum wattage.
7. Restore electrical power to installation point ON. Retain this sheet for future reference.

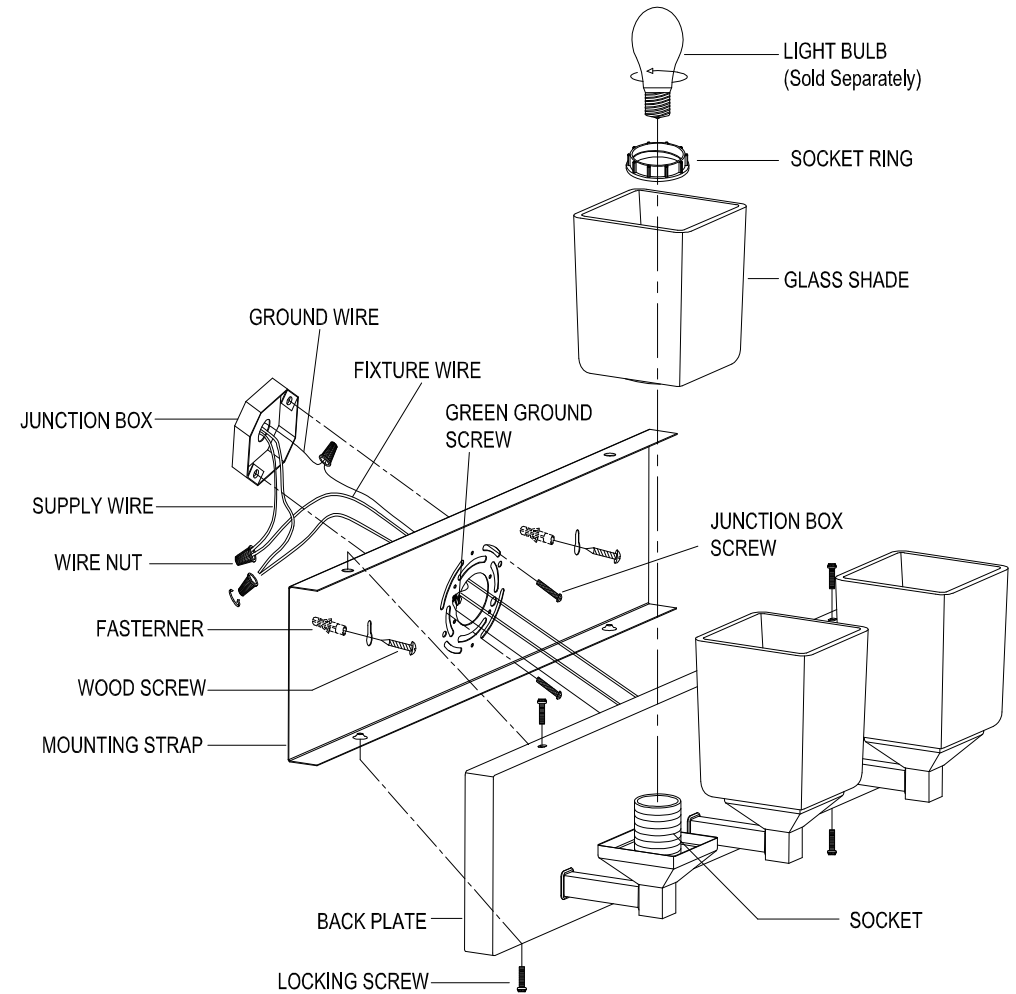

#802413 (506493)

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,  
CONSULT A LICENSED ELECTRICIAN.**

*Customer Service: 1-800-558-8700*