
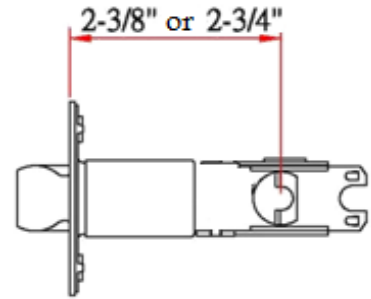


UL latch replacement kit

Specifications

Latch Type	Fixed Latch 2-3/8" (60mm) or 2-3/4" (70mm)
Door Prep	Cross bore 2-1/8" dia (54mm). Edge bore 1" dia (25mm)
Backset	Fixed-- either 2-3/8" (60mm) or 2-3/4" (70mm)
Door Thickness	1-3/8" or 1-3/4" door standard
Faceplate	1" x 2-1/4" Square Corner
Strike	T-Strike
Bolt	Full 1/2" throw. Brass plated
Door Handing	Non-handed. Reversible for Left or Right hand doors.
Keyway	n/a
Keyed Alike	n/a

Dimensions

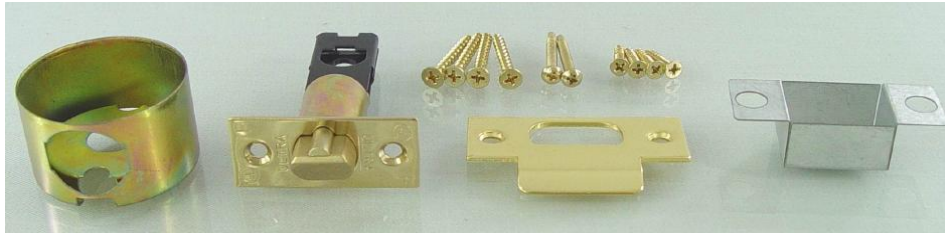




Warranty & Compliances

Warranty	Limited Lifetime Mechanical / 5 year Finish
ANSI/BHMA	Meets ANSI Grade 3 specification
ADA	N/A
UL	F-rated for use on fire doors up to 3 hours.



Order Codes

	2-3/8"	2-3/4"	
Polished Brass	702555	702589	
Satin Nickel	702563	702597	
Oil Rubbed Bronze	702571	702605	

Type:

Job:

Order Code:

Approvals:

Design House reserves the right to make changes in materials, specifications & models at any time. Design House also reserves the right to discontinue product without notice or obligation.